



LUNA LITE



Feature Overview



Drawer available as optional extra

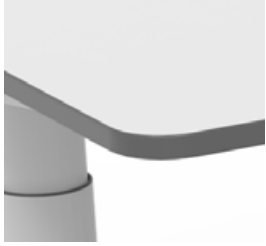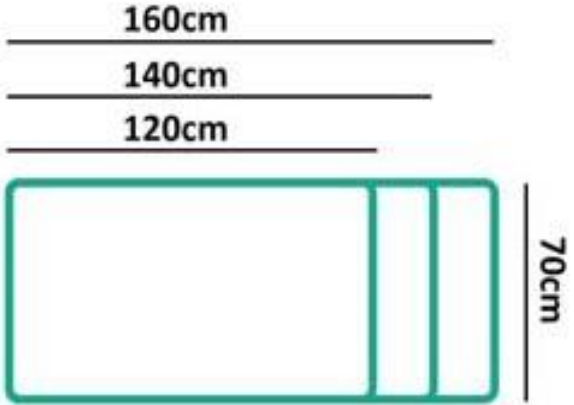

20mm commercial particle board with 2.5mm gun grey edge band



LED display handset with 2 memory presets and patented first to market "HSM" (Health Spine Mode) function



Double telescopic support beam construction to ensure stability



Optional felt lined drawer



Two stage designer round columns with adjustable floor leveling pads

HSM Mode

When activated, the desk will make insensible movement upside from set sitting position by 12cm over 5 minutes, and later will automatically revert to original position in another 5 minutes.

This helps alleviate slouching and helps correct user posture for neck and spinal health.

TECHNICAL SPECIFICATION

Models: LU1200/LU1400/LU1600

Rating 220-240V AC, 50/60Hz, 1.5A



Models:	LU1200/LU1400/LU1600
Desk Top Dimensions (Metric):	1200 x700 x 18mm/1400 x 700 x 18mm/ 1600 x 700 x 18mm
Desk Top Dimensions (Imperial):	47.2 X 27.6 X 0.7"/ 55.1 X 27.6 X 0.7"/ 63.0 X 27.6 X 0.7"
Height Range:	720 - 1170mm/28.3 - 46.1"
Maximum Load of Desk Top (inclusive of Desk Top):	80kg/176lb
Frame Construction:	Steel
Desk Top Construction:	Particle board
Adapter Input Voltage:	100 - 240V AC 1.5A
Adapter Output Voltage:	29V, 1.8A
Number of Motors:	1
DC Motor Input Voltage:	24V DC, 3A
Motor Speed (Vertical Lift):	25mm/s
Noise Level:	<48dB
Controller Input Voltage:	29V DC
Controller Output Voltage:	24V DC 4A
Number of Presets:	2
Power Cord Plug Types:	Type-I
Intended Use Temperature Range:	-20°C to 50°C
Intended Use Humidity Range:	RH 40% - 80%